




FORKLIFT SAFETY SOLUTIONS

COMPLETE SYSTEM

Safe&Stop


ACTIVE SYSTEMS



When the sensor, placed on the rear part of the vehicle, detects an obstacle **Safe&Stop**, immediately alert the operator through visual and acoustic alerts. In addition the system can intervene on the speed of the vehicle (*) in two steps strongly reducing the risk of collision and accident.

(*) to be confirmed according to the vehicle features

- ✓ **ULTRASONIC SENSOR**
- ✓ **DETECTION DISTANCE UP TO 4 M**
DETECTION WIDTH UP TO 3 M (SIDE RECEIVERS CAN'T BE DE-ACTIVATED)
- ✓ **MINIMIND ADVANCED DISPLAY**
- ✓ **COMPACTNESS FOR MAXIMUM INTEGRATION**
- ✓ **WIDE RANGE OF CUSTOMIZABLE PARAMETERS**

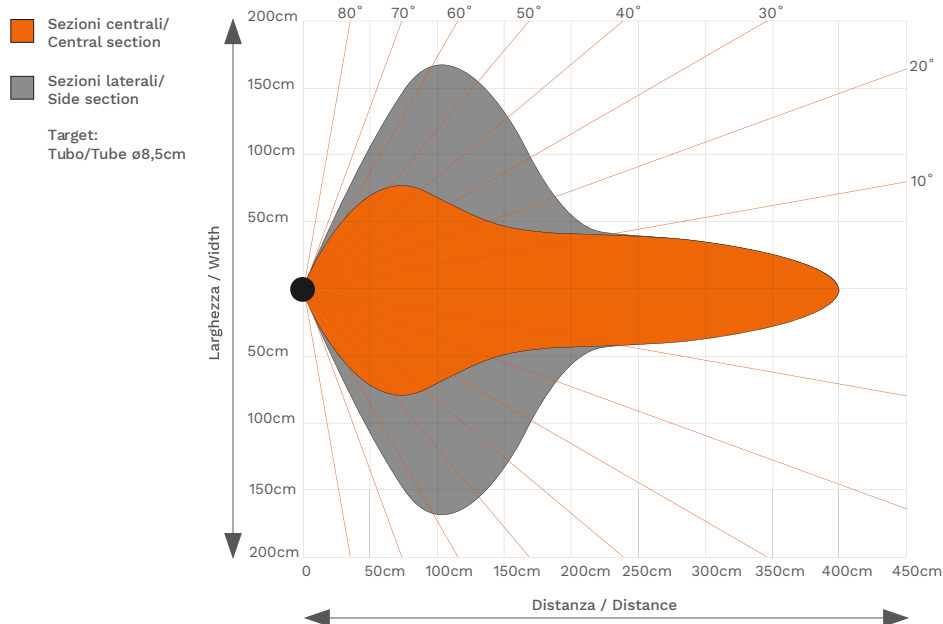

System architecture is based on the display as main element. Once connected to the vehicle it provides power supply to the sensor and the interfacing with the vehicle.


KIT CONTENTS

Display kit inclusive of:

- MiniMind advanced display and related brackets;
- connectors/contacts/seals kit.

Sensor kit inclusive of:

- CySens ultrasonic sensor;
- connecting cable;
- brackets, bolts, washers kit;
- connectors/contacts/seals kit.



User manual and CE Conformity Declaration

GENERAL FEATURES

Number of sensors	1
Operating voltage	10-36VDC
Activation trigger voltage	10-36VDC
Operating current	500mA max
Outputs	1x relay out COM/NC/NO for A1 status (yellow alarm and optional sensor) 1x relay out COM/NC/NO for A2 status (red alarm)
Temperature range	-30°C / +80°C (electronic parts)
Applied norms/directives	2006/42/CE - 2014/30/CE - UNI EN ISO 12100
Official normative definition	safety component

SENSOR TECHNICAL FEATURES

Technology	ultrasound
Operating Frequency	40kHz
Number of transmitters	1
Number of receivers	3
Response time	100ms
Dimensions	130mm x 80mm x 80mm
IP Grade	IP62 min
Temperature range	-30°C / +80°C (electronic parts)

DISPLAY TECHNICAL FEATURES

Visual feedback type	RGB LEDs (adjustable brightness)
Acoustic feedback type	Piezoelectric buzzer
Sound pressure level	85dB max (adjustable)
IP Grade	IP50
Temperature range	-30°C / +80°C (electronic parts)



Forklift Safety Solutions

Unit 5, Tamworth Enterprise Park, Lichfield Road Ind. Est, Tamworth, B79 7UL
 Email : sales@forklift-safety.co.uk Tel : 07967 190970

